


Step 1: Hold uprights about 48" apart with levelers resting on the floor and the channels facing each other. Step 2: Insert tabs of cross channel into slots at bottom of uprights. Seat in place by tapping on each end of cross channel.



Step 3: Slide hardboard panel into channels on uprights and cross channel.

Step 4: Assemble top panel retainer between uprights, ensuring hardboard panel fits into channel. Push down until the projections "pop" onto uprights. Step 5: Continue building full length of t-sytem. Last upright installed should be an end upright.

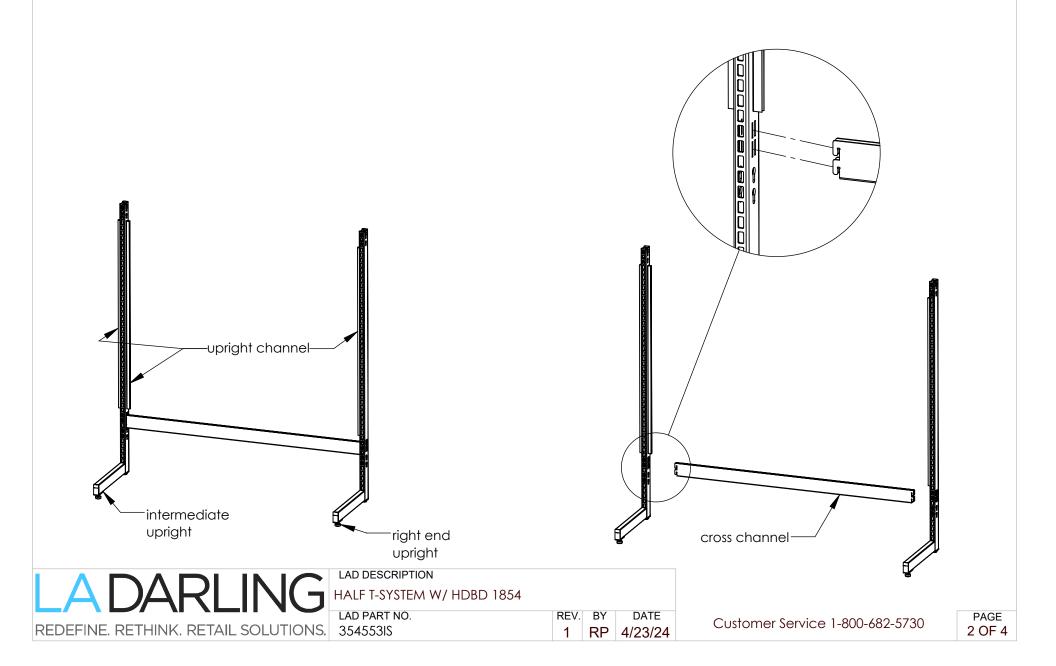