


Sam's Club Part #: 100744659


Sam's Club Description:
LAPTOP TABLE W/MONITOR BOX 96

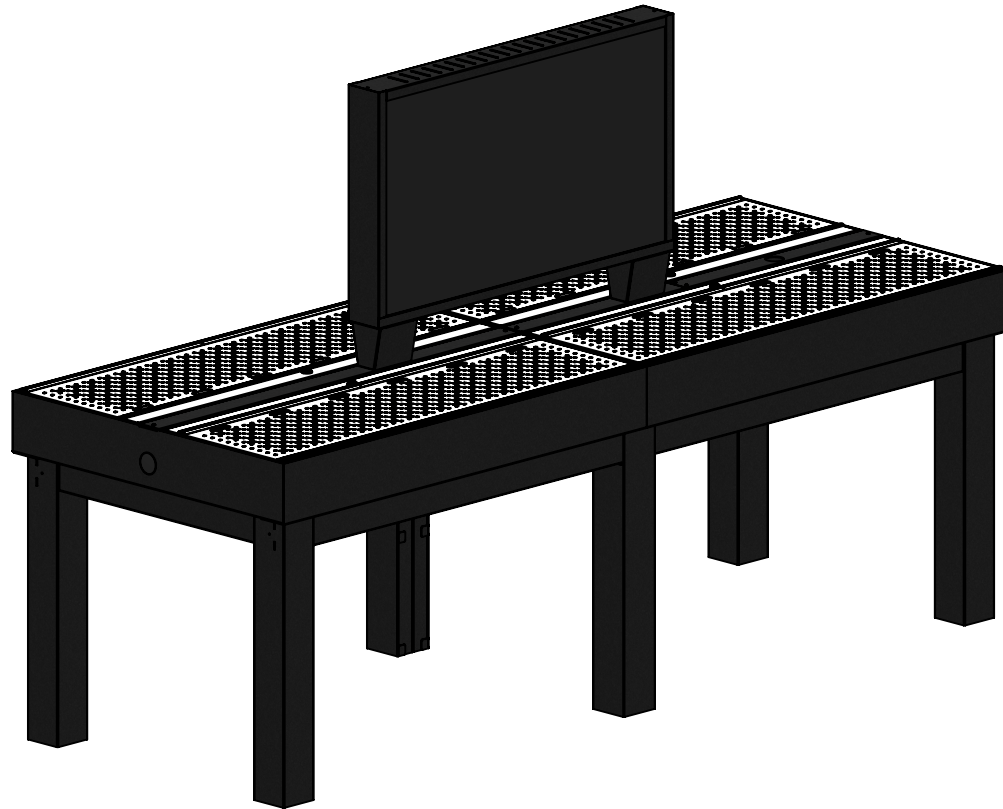

Scan the QR code or visit
[www.ladarling.com/installation-
instructions/sams-electronics-table/](http://www.ladarling.com/installation-instructions/sams-electronics-table/)
for the digital copy of the instruction sheets.



STEP 1: LOCATE TABLES PER FLOOR PLAN AND ALIGN, AS SHOWN BELOW.

A MINIMUM OF 4 ASSOCIATES ARE RECOMMENDED FOR LIFTING TABLES OFF PALLETS.

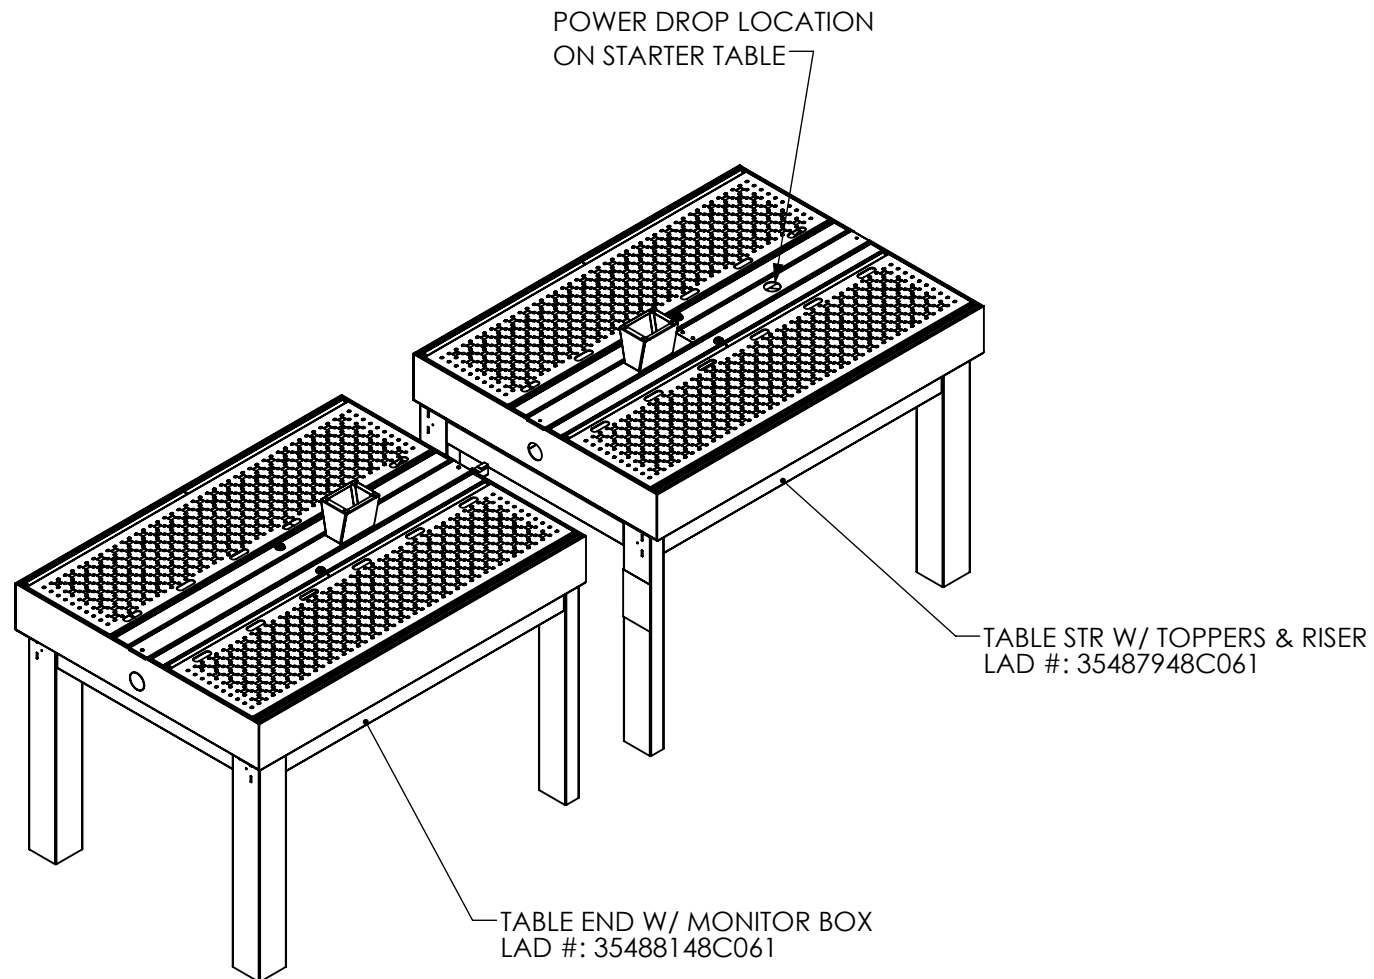


STEP 2: REMOVE CENTER COVER AND WIRE COVER FROM STARTER TABLE


STEP 3: CONNECT WIRE PLUGS AND SLIDE TABLES TOGETHER CAREFULLY, ENSURING THAT WIRES ARE NOT PINCHED BETWEEN THE TABLES. REATTACH CENTER COVER TO STARTER TABLE.

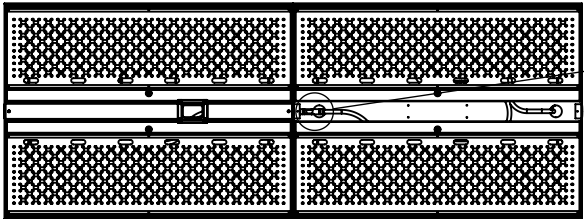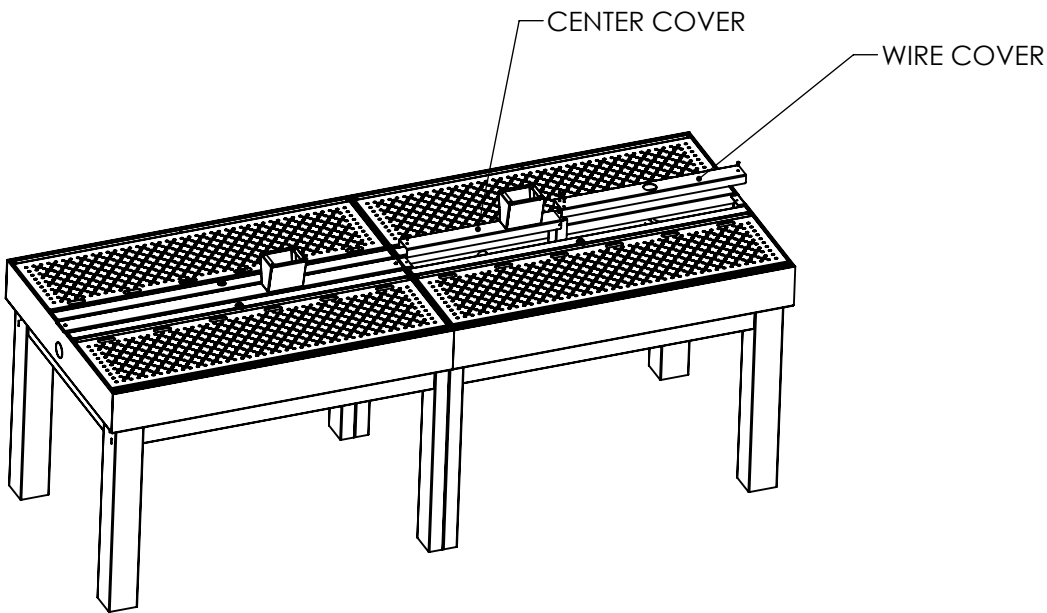



TOP VIEW

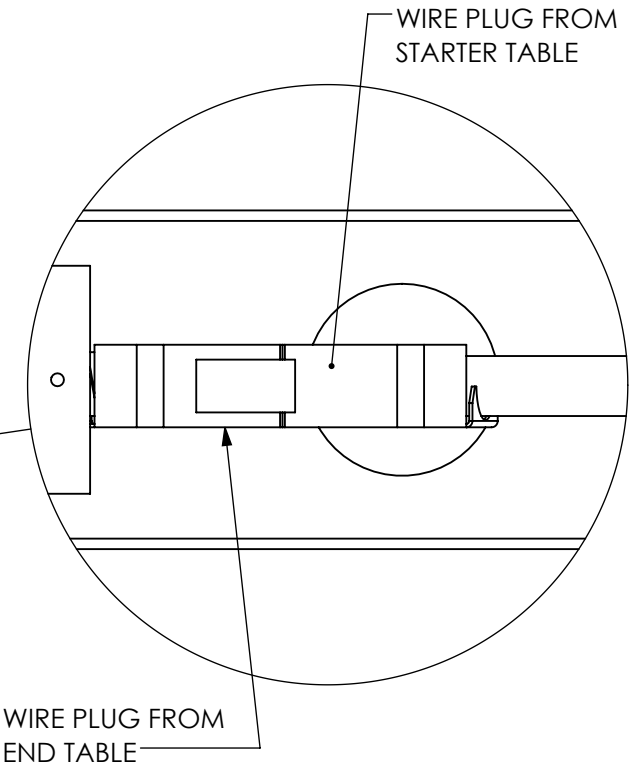


STEP 4: SLIDE LEG COVERS OVER THE 2" X 4" TABLE LEGS. BEND THE TABS TO LOCK THE COVERS IN PLACE.

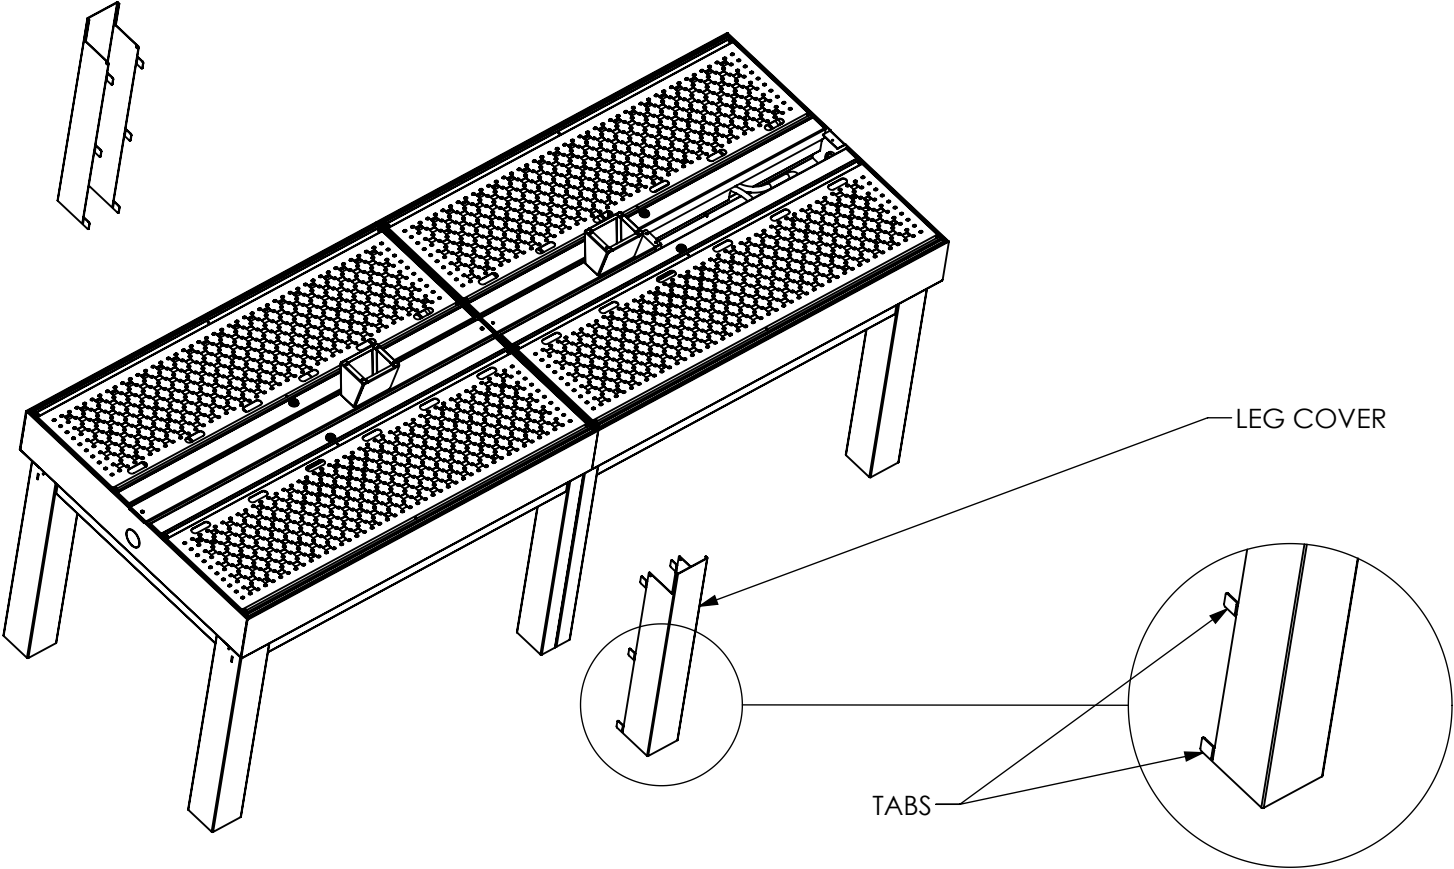

STEP 5: CONNECT POWER DROP CORD TO JUNCTION BOX UNDER TABLE AND ROUTE THROUGH RECEIVER BOX HOLE IN STARTER TABLE AND THROUGH HOLE IN WIRE COVER. DO NOT REINSTALL WIRE COVER. DATA CABLES SHOULD ALSO BE ROUTED THROUGH WIRE COVER HOLE.

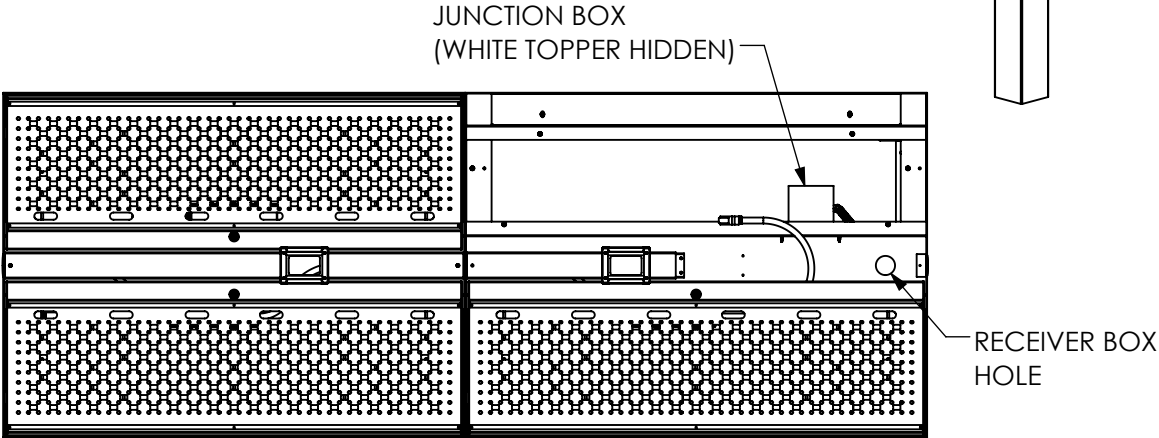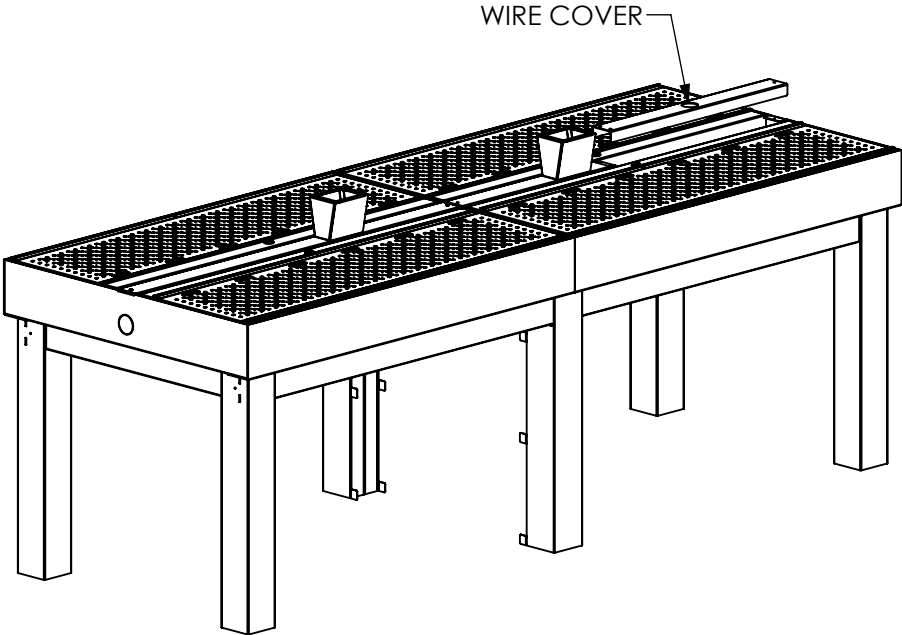


STEP 6: CONNECT MOUNTING FRAME TO RISERS ON BOTH TABLES USING (8) #8-32 SCREWS.

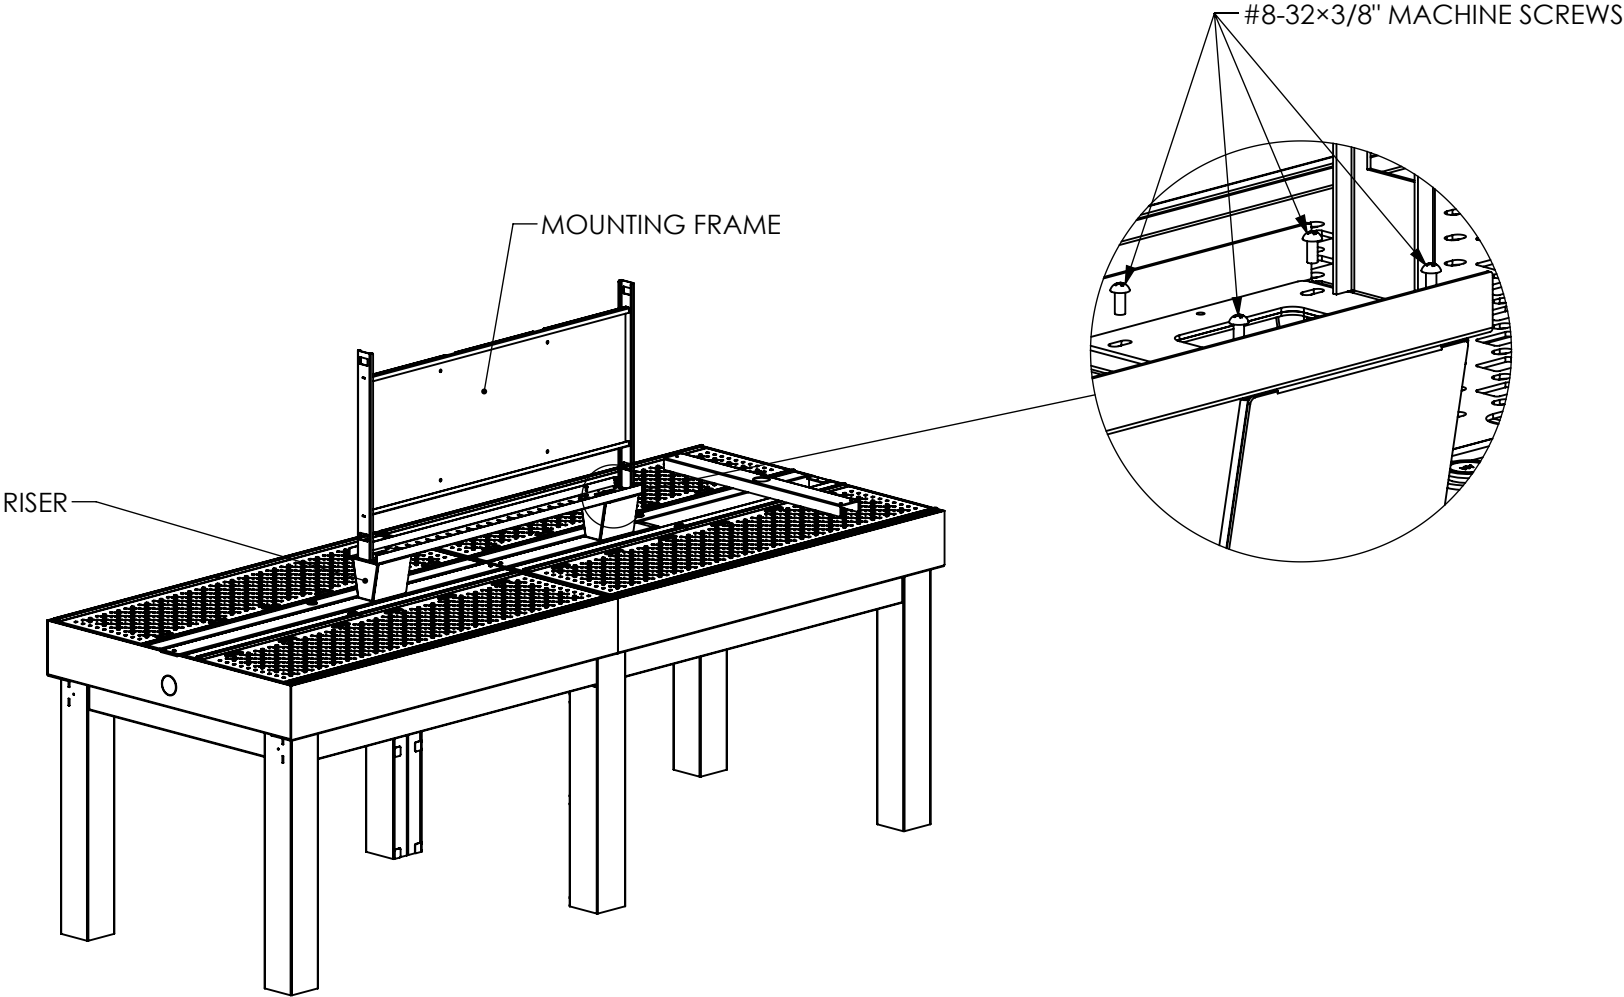

STEP 7: CONNECT DATA AND POWER CORDS TO MONITOR AND ROUTE THROUGH RISER. ATTACH MONITOR TO MOUNTING FRAME WITH (4) M6×18 SCREWS.

STEP 8: CONNECT DATA AND POWER CORDS TO SECOND MONITOR AND ROUTE THROUGH RISER. ATTACH MONITOR TO BRACKET WITH (4) M6×18 SCREWS. HOOK BRACKET INTO SLOTS ON MOUNTING FRAME.

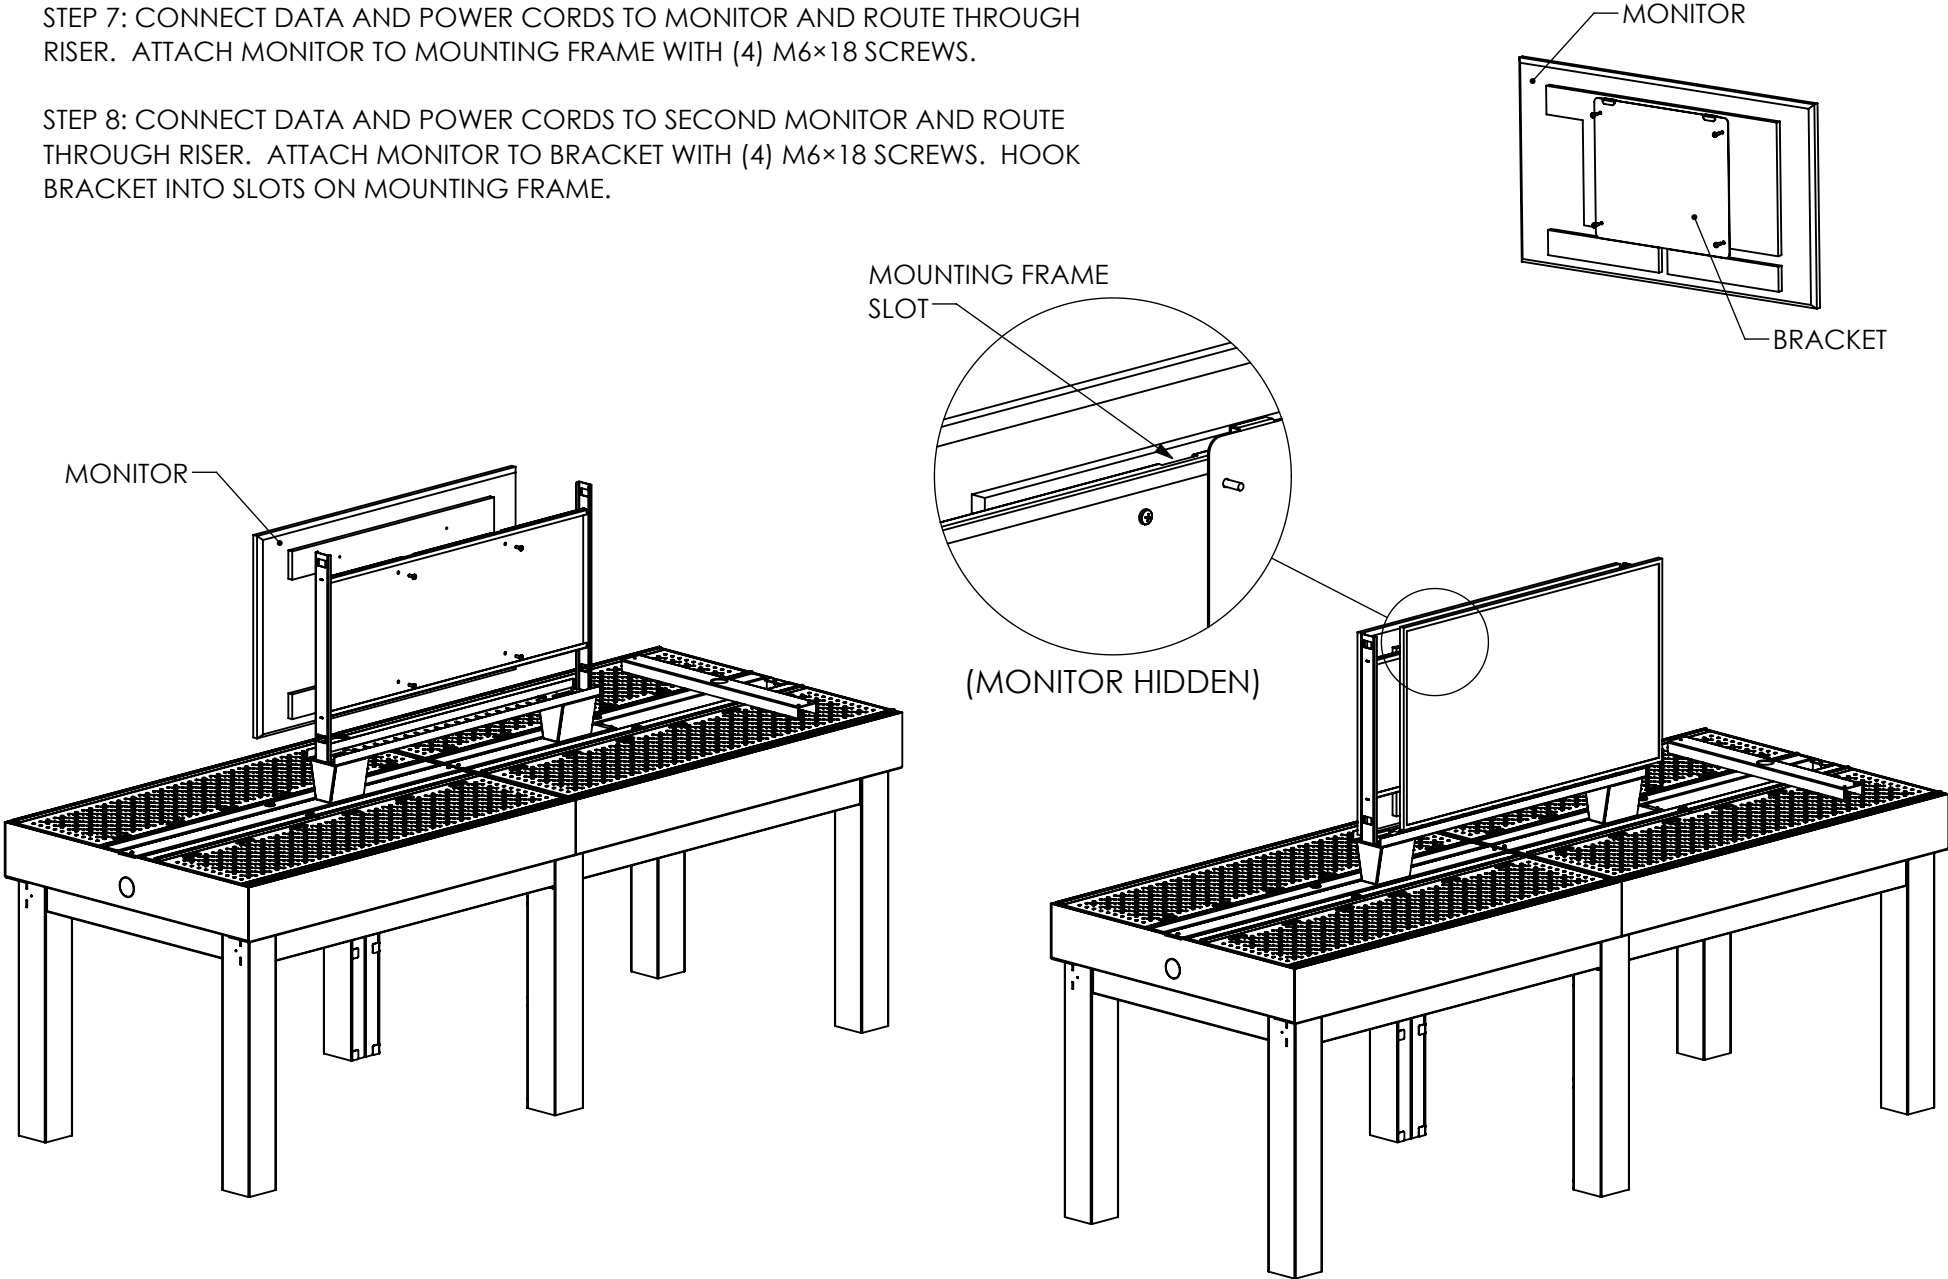

STEP 9: HOOK SIDE COVERS INTO SLOTS ON ENDS OF MOUNTING FRAME.

STEP 10: ATTACH TOP COVER TO MAGNETS ON SIDE COVERS.

